

AD-A200 480

Optical System Defect Propagation in ABCD Systems,

W. G. McKINLEY
ITEK Optical Systems
Lexington, MA 02173

H. T. YURA
Electronics Research Laboratory
The Aerospace Corporation
El Segundo, CA 90245

and

S. G. HANSON
Risø National Laboratory
DK-4000 Roskilde, Denmark

3 October 1988

Prepared for
SPACE DIVISION
AIR FORCE SYSTEMS COMMAND
Los Angeles Air Force Base
P.O. Box 92960
Los Angeles, CA 90009-2960

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION UNLIMITED

DTIC
ELECTE
NOV 04 1988
S D
C
H

88 11 4 010

This report was submitted by The Aerospace Corporation, El Segundo, CA 90245, under Contract No. F04701-85-C-0086 with the Space Division, P.O. Box 92960, Worldway Postal Center, Los Angeles, CA 90009-2960. It was reviewed and approved for The Aerospace Corporation by M. J. Daugherty, Director, Electronics Research Laboratory.


Lt Scott Levinson, SD/CNID was the project officer for the Mission-Oriented Investigation and Experimentation (MOIE) Program.

This report has been reviewed by the Public Affairs Office (PAS) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nationals.

This technical report has been reviewed and is approved for publication. Publication of this report does not constitute Air Force approval of the report's findings or conclusions. It is published only for the exchange and stimulation of ideas.



SCOTT W. LEVINSON, Lt, USAF
MOIE Project Officer
SD/CNID

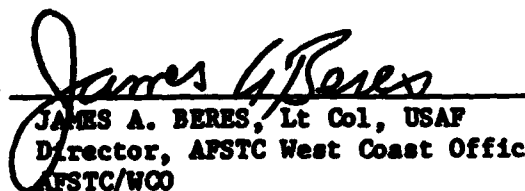

JAMES A. BERES, Lt Col, USAF
Director, AFSTC West Coast Office
AFSTC/WCO

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

| | | | | | |
|--|-------|---|---|---|----------------------------|
| 1a. REPORT SECURITY CLASSIFICATION Unclassified | | | 1b. RESTRICTIVE MARKINGS | | |
| 2a. SECURITY CLASSIFICATION AUTHORITY | | | 3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited. | | |
| 2b. DECLASSIFICATION/DOWNGRADING SCHEDULE | | | 5. MONITORING ORGANIZATION REPORT NUMBER(S) SD-TR-88-95 | | |
| 4. PERFORMING ORGANIZATION REPORT NUMBER(S) TR-0088(3925-04)-2 | | | 5. MONITORING ORGANIZATION REPORT NUMBER(S) SD-TR-88-95 | | |
| 6a. NAME OF PERFORMING ORGANIZATION The Aerospace Corporation Laboratory Operations | | 6b. OFFICE SYMBOL (If applicable) | 7a. NAME OF MONITORING ORGANIZATION Space Division Los Angeles Air Force Base | | |
| 6c. ADDRESS (City, State, and ZIP Code) El Segundo, CA 90245 | | 7b. ADDRESS (City, State, and ZIP Code) Los Angeles, CA 90009-2960 | | | |
| 8a. NAME OF FUNDING/SPONSORING ORGANIZATION | | 8b. OFFICE SYMBOL (If applicable) | 9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER F04701-85-C-0086-P00019 | | |
| 8c. ADDRESS (City, State, and ZIP Code) | | 10. SOURCE OF FUNDING NUMBERS | | | |
| | | PROGRAM ELEMENT NO. | PROJECT NO. | TASK NO. | WORK UNIT ACCESSION NO. |
| 11. TITLE (Include Security Classification) Optical System Defect Propagation in ABCD Systems | | | | | |
| 12. PERSONAL AUTHOR(S) McKinley, W. G., Yura, H. T., and Hanson, S. G. | | | | | |
| 13a. TYPE OF REPORT | | 13b. TIME COVERED FROM TO | | 14. DATE OF REPORT (Year, Month, Day) 1988 October 3 | |
| | | | | 15. PAGE COUNT 9 | |
| 16. SUPPLEMENTARY NOTATION | | | | | |
| 17. COSATI CODES | | | 18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) | | |
| FIELD | GROUP | SUB-GROUP | Ray decenters, Despace errors | | |
| | | | | | |
| 19. ABSTRACT (Continue on reverse if necessary and identify by block number) | | | | | |
| <p>This report describes how optical system defects (tilt/jitter, decenter, and despace) propagate through an arbitrary paraxial optical system that can be described by an ABCD ray transfer matrix. A pedagogical example is given that demonstrates the effect of alignment errors on a typical optical system. <i>Rayworks</i></p> | | | | | |
| 20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS | | | 21. ABSTRACT SECURITY CLASSIFICATION Unclassified | | |
| 22a. NAME OF RESPONSIBLE INDIVIDUAL | | | 22b. TELEPHONE (Include Area Code) | | 22c. OFFICE SYMBOL |

A general methodology for analyzing beam wave propagation in complex paraxial optical systems that can be described by an ABCD ray transfer matrix was put forth in a recent publication (Ref. 1). In the methodology is a formalism for evaluating ray tilt in a general optical system. This report is an addendum to Ref. 1 which describes how additional optical system defects may be included in the wave propagation analysis in a straightforward manner. First, the addition of ray decenters to the tilt analysis will be discussed. Second, the inclusion of despace errors will be discussed to complete the modeling of alignment defects, and lastly, a procedure for modeling the manufacturing errors of radius errors and cylinder errors will be identified.

In Section 5 of Ref. 1 tilt and jitter in optical systems were discussed and Eqs. (54)-(63) quantifying the description were presented. Equation (54) of Ref. 1 defines a Gaussian random tilt variable for the j -th optical element as

$$\underline{\theta}_j = \langle \underline{\theta}_j \rangle + \delta \underline{\theta}_j = \begin{bmatrix} 0 \\ \langle \theta_j \rangle \end{bmatrix} + \begin{bmatrix} 0 \\ \delta \theta_j \end{bmatrix}$$

If $\underline{\theta}_j$ is generalized to include a Gaussian random displacement variable, then element decenters may also be modeled using the same formalism as outlined for tilts to evaluate ray decenters. Generalizing Eq. (54) is straightforward: by including a decenter error, \underline{h}_j , the tilt vector, now generalized, becomes

$$\underline{\theta}_j = \begin{bmatrix} \langle \underline{h}_j \rangle \\ \langle \theta_j \rangle \end{bmatrix} + \begin{bmatrix} \delta \underline{h}_j \\ \delta \theta_j \end{bmatrix} \quad (54')$$

where angular brackets denote the mean value, and the primed equations (here and below) give the corresponding modifications to the results of Ref. 1.

The changes to the remaining equations of Section 5 are straightforward. There are only four changes to the remaining equations:



| | |
|--------------------|-------------------------|
| Distribution/ | |
| Availability Codes | |
| Dist | Avail and/or Special |
| A-1 | |

$$r_j^+ = A_j^- + B_j(r_j') + h_j \quad (55')$$

$$T_j = \begin{bmatrix} h_j \\ \theta_j \end{bmatrix} \quad (59')$$

$$t = \sum_{j=1}^n [A_j h_j + B_j \theta_j] \quad (61')$$

$$t' = \sum_{j=1}^n [C_j h_j + D_j \theta_j] , \quad (62')$$

All other equations may be used as is to predict the performance of optical systems experiencing both ray tilts and decenters.

Another major alignment defect is despace (i.e., a change in separation between any two surface entities). This error type cannot be handled as a ray tilt or decenter. To incorporate this type of error one must include an additional translation matrix, S_j , in the appropriate location in the matrix product which describes the optical system. This inclusion will result in minor modification of Eq. (57), and Eq. (58) of Ref. 1 if necessary, to incorporate the additional matrix. Other defects may be modeled this way. Surface tilts and decenters may be incorporated directly by replacing untilted or decentered surfaces with tilted or decentered surfaces. References 2 and 3 give excellent discussions on tilts and decenters. In the same manner, the manufacturing defects of radius error and cylinder may also be included by the introduction of additional defect matrices to the system description matrix. To model radius errors, an additional powered surface is added prior to the designed surface. Cylinder is modeled by adding the defect into only one of the axes, x or y . If necessary, the cylinders may be rotated, but the resultant terms of the form "Axy" will necessitate the use of full 4×4 matrix analysis (Refs. 4,5). Radius and cylinder errors may also be modeled directly by a random error analysis of the curvature variables, but the inclusion of additional matrices is sometimes clerically advantageous.

A pedagogical example now follows that will demonstrate the effect of alignment errors (tilt, decenter, and despace) on a typical optical system. Referring to Fig. 1, an focal telescope is shown followed by a focusing lens. This is a typical system often encountered in practice or as a beam director to view distant objects. In this case, the model is comprised of three repetitions of the Fourier transform configuration. The first two establish an focal relay with magnification, m , and the third produces a focus for a detector. In the transform configuration, a collimated input produces a focal output and vice versa. Without defects, the model for the system is

$$\underline{y}_7 = \begin{bmatrix} 0 & f_3/m \\ -m\phi_3 & 0 \end{bmatrix} \underline{y}_1 \quad (1)$$

where \underline{y}_1 and \underline{y}_7 are the ray column vectors of the input and output planes, respectively, $m = -\phi_1 f_2$, and $\phi_j = 1/f_j$.

As indicated in Fig. 2, the defect model considered here is a despace (of separation s) between the foci of the afocal relay, a decenter h of the second afocal lens in the x -direction and a tilt θ of the focusing lens also in the x -direction. The result, including defects, is

$$\underline{y}_7 = M_3 M_2 S M_1 \underline{y}_1 + M_3 M_2 \begin{bmatrix} h \\ 0 \end{bmatrix} + M_3 \begin{bmatrix} 0 \\ \theta \end{bmatrix} \quad (2)$$

where M_i and S are the basic Fourier transform and despace ray transfer matrix, given by

$$M_i = \begin{bmatrix} 0 & f_i \\ -\phi_i & 0 \end{bmatrix}, \quad i = 1, 2, 3 \quad (3)$$

and

$$S = \begin{pmatrix} 1 & s \\ 0 & 1 \end{pmatrix}, \quad (4)$$

respectively.

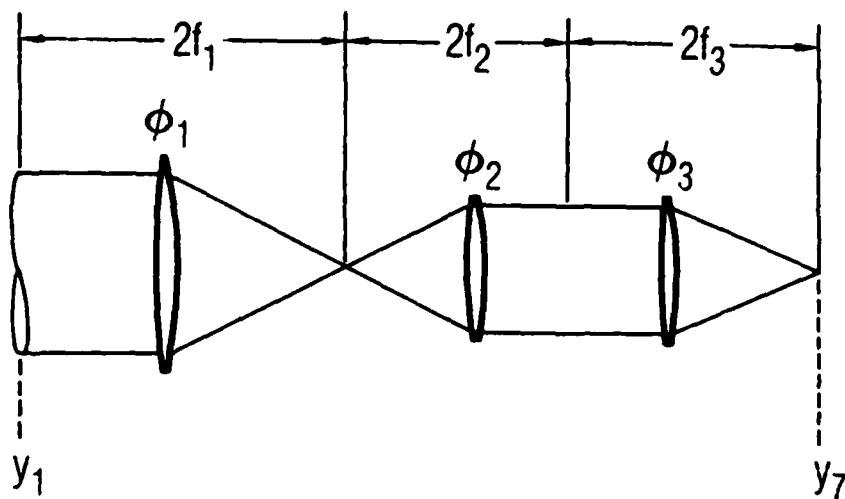


Fig. 1. The Example System Without Alignment Errors

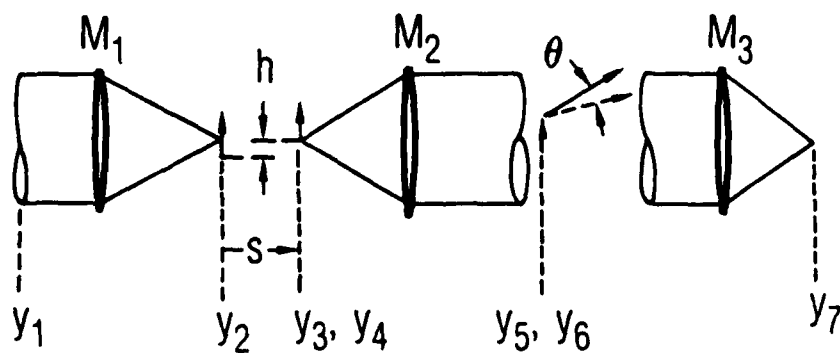


Fig. 2. The Example System with Alignment Errors: Despace, s , Decenter, h , and Ray Tilt, θ

Substitution of Eq. (6) into Eq. (63) of Ref. 1 yields the output diffracted field as

$$\begin{aligned}
 u(\underline{r}_2) = & -\frac{ikm}{2\pi f_3} \exp [ik\phi_2 f_3 h (\hat{i} \cdot \underline{r}_2)] \\
 & \times \int d^2 r_1 u_1(\underline{r}_1) \exp(-ikm \phi_1 \phi_2 f_3 s r_1^2 / 2f_3) \\
 & \times \exp [-ikm(f_3 \theta \hat{i} + \underline{r}_2) \cdot \underline{r}_1],
 \end{aligned} \tag{5}$$

where \hat{i} is a unit vector along the x-axis, and a constant multiplicative phase factor has been omitted. The terms outside the integral express the amplitude and a constant wavefront tilt caused by the decenter, h . The initial field, $u_1(\underline{r}_1)$, is multiplied by a quadratic phase factor indicative of the defocus caused by the afocal telescope despace. The Fourier transform term is shifted as a result of the ray tilts prior to the focusing lens. As one would expect, the alignment defects of despace, decenter, and tilt have resulted in defocus, tilt, and translation, respectively, of the output field.

A word of caution is in order regarding the modeling of alignment errors. The total ray vector with errors is given by

$$\underline{y}' + d\underline{y}' = (M + dM)\underline{y} + M(\underline{y} + d\underline{y}).$$

The first term on the right hand side, $M + dM$, corresponds to a system surface defect-surface tilt, decenter, or despace; while the term $\underline{y} + d\underline{y}$ represents a ray defect. When using ray tilts and decenters to model alignment errors these are not always identical to surface tilts and decenters. Consider a plane mirror. If prior to a mirror surface a ray is tilted, the ensuing optical system will experience a ray tilt whose magnitude is equal to the additional tilt. This is because the mirror acts only as a fold in the optical path. If the mirror surface is tilted, the ensuing optical system will experience a ray tilt equal to twice the surface tilt; termed "optical

these are not always identical to surface tilts and decenters. Consider a plane mirror. If prior to a mirror surface a ray is tilted, the ensuing optical system will experience a ray tilt whose magnitude is equal to the additional tilt. This is because the mirror acts only as a fold in the optical path. If the mirror surface is tilted, the ensuing optical system will experience a ray tilt equal to twice the surface tilt; termed "optical doubling". Mirrors are not the only optical elements to experience a disparity between ray defects and surface defects. Refracting surfaces also experience a difference although not as dramatic. In a refractor, if a ray tilt is used instead of a surface tilt, a weak size obliquity is not accounted for that is included when a surface tilt is used. Usually, ignoring the obliquity is of no consequence, but the fact that it is being ignored must not be overlooked.

References

1. H. T. Yura and S. G. Hanson, "Optical Beam Wave Propagation Through Complex Optical Systems," J. Opt. Soc. Am. A, Oct., 1987.
2. G. A. Massey and A. E. Siegman, "Reflection and Refraction of Gaussian Light Beam at Tilted Ellipsoidal Surfaces," Appl. Opt. 8, 875 (1968).
3. R. Kingslake, Lens Design Fundamentals, Academic Press, Inc., New York 1978, Chapter 2.
4. A. E. Siegman, Lasers, Oxford Univ. Press, New York, 1986, Chapter 15.
5. S. A. Collins, Jr., "Lens-System Diffraction Integral Written in Terms of Matrix Optics", J. Opt. Soc. Am. 60, 1168 (1970).

LABORATORY OPERATIONS

The Aerospace Corporation functions as an "architect-engineer" for national security projects, specializing in advanced military space systems. Providing research support, the corporation's Laboratory Operations conducts experimental and theoretical investigations that focus on the application of scientific and technical advances to such systems. Vital to the success of these investigations is the technical staff's wide-ranging expertise and its ability to stay current with new developments. This expertise is enhanced by a research program aimed at dealing with the many problems associated with rapid, evolving space systems. Contributing their capabilities to the research effort are these individual laboratories:

Aerophysics Laboratory: Launch vehicle and reentry fluid mechanics, heat transfer and flight dynamics; chemical and electric propulsion, propellant chemistry, chemical dynamics, environmental chemistry, trace detection; spacecraft structural mechanics, contamination, thermal and structural control; high temperature thermomechanics, gas kinetics and radiation; cw and pulsed chemical and excimer laser development including chemical kinetics, spectroscopy, optical resonators, beam control, atmospheric propagation, laser effects and countermeasures.

Chemistry and Physics Laboratory: Atmospheric chemical reactions, atmospheric optics, light scattering, state-specific chemical reactions and radiative signatures of missile plumes, sensor out-of-field-of-view rejection, applied laser spectroscopy, laser chemistry, laser optoelectronics, solar cell physics, battery electrochemistry, space vacuum and radiation effects on materials, lubrication and surface phenomena, thermionic emission, photo-sensitive materials and detectors, atomic frequency standards, and environmental chemistry.

Computer Science Laboratory: Program verification, program translation, performance-sensitive system design, distributed architectures for spaceborne computers, fault-tolerant computer systems, artificial intelligence, micro-electronics applications, communication protocols, and computer security.

Electronics Research Laboratory: Microelectronics, solid-state device physics, compound semiconductors, radiation hardening; electro-optics, quantum electronics, solid-state lasers, optical propagation and communications; microwave semiconductor devices, microwave/millimeter wave measurements, diagnostics and radiometry, microwave/millimeter wave thermionic devices; atomic time and frequency standards; antennas, rf systems, electromagnetic propagation phenomena, space communication systems.

Materials Sciences Laboratory: Development of new materials: metals, alloys, ceramics, polymers and their composites, and new forms of carbon; non-destructive evaluation, component failure analysis and reliability; fracture mechanics and stress corrosion; analysis and evaluation of materials at cryogenic and elevated temperatures as well as in space and enemy-induced environments.

Space Sciences Laboratory: Magnetospheric, auroral and cosmic ray physics, wave-particle interactions, magnetospheric plasma waves; atmospheric and ionospheric physics, density and composition of the upper atmosphere, remote sensing using atmospheric radiation; solar physics, infrared astronomy, infrared signature analysis; effects of solar activity, magnetic storms and nuclear explosions on the earth's atmosphere, ionosphere and magnetosphere; effects of electromagnetic and particulate radiations on space systems; space instrumentation.

...